


FIRE BARRIER SYSTEM

Floor to Floor to Wall | Wall to Wall
25 - 125 mm (1 - 5") Expansion Gaps

Fireflex 2000 : A01-A02

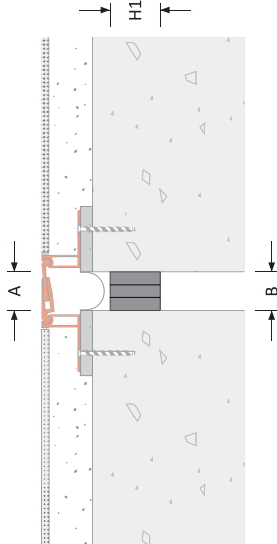

Fire Barrier Selection Criteria				Load Rating		Product Details				
Joint Location	Gap Width B (mm)	Movement Capacity (mm)	±	[Total]	Eurocode Rating			Product Dimensions Height		Product Number
								H1 (mm)	H2 (mm)	
2 Hour Fire Rated (120 mins)										
Floor - Floor Floor - Wall Wall - Wall Corner Wall Ceiling - Ceiling	25	± 12		[25]					25	2000-A01-025-2
	35	± 17		[35]					35	2000-A01-035-2
	50	± 25		[50]					50	2000-A01-050-2
	75	± 37		[75]				65	-	2000-A01-075-2
	100	± 50		[100]					100	2000-A01-100-2
	125	+ 25 / - 75		[100]					125	2000-A01-125-2
4 Hour Fire Rated (240 mins)										
Floor - Floor Floor - Wall Wall - Wall Corner Wall Ceiling - Ceiling	25	± 12		[25]					25	2000-A02-025-4
	35	± 17		[35]					35	2000-A02-035-4
	50	± 25		[50]					50	2000-A02-050-4
	75	± 37		[75]				100	-	2000-A02-075-4
	100	± 50		[100]					100	2000-A02-100-4
	125	+ 25 / - 75		[100]					125	2000-A02-125-4

Features

Movement

Easy to install
High movement capacity $\pm 50\text{mm}$
ASTM E-1399 Class I: Thermal
Class II: Wind

Material

Intumescent graphite layers
Class O foam

Traffic Frequency per day

				
-	-	-	-	-

System Options

Gap width(s)	25, 35, 50, 75, 100, 125 mm
Height(s)	Not applicable
Metal type(s):	None
Colour(s)	Black RAL 7021 intumescent seal
Fire barrier	BS 476: 120-240 minutes
Waterproofing	Waterproofing membrane
Pre-assembly in factory	Contact Vexcolt

FIRE BARRIER SYSTEM

Floor to Floor to Wall | Wall to Wall
25 - 125 mm (1 - 5") Expansion Gaps

Fireflex 2000 : A01-A02



APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
Department Stores | Distribution & Retail Warehouses
Factories | Hospitals | Museums | Offices & Hotels
Parking | Places of Worship | Residential Buildings
Rail, Metros & Elevated Rail Stations | Roads & Bridges
Shopping Centres | Sports Stadiums | Supermarkets

www.vexcoltindia.com