


FIRE BARRIER SYSTEM

Floor to Floor | Wall to Wall | Corner
25 - 500 mm (1 - 20") Expansion Gaps

Fireflex 2200 : A01-A02

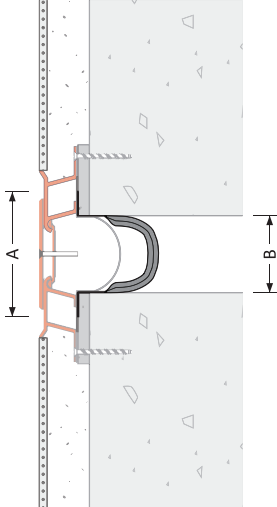

Fire Barrier Selection Criteria

Load Rating

Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm) ± [Total]	Eurocode Rating			Product Dimensions			Sightline A (mm)	Blockout C (mm)	Product Number
						H1 (mm)	Height H2 (mm)				
2 Hour Fire Rated (120 mins)											
Floor - Floor Wall - Wall Ceiling - Ceiling	25	± 12	[25]						95		2200-A01-025-2
	50	± 25	[50]						120		2200-A01-050-2
	75	± 37	[75]						145		2200-A01-075-2
	100	± 50	[100]						170		2200-A01-100-2
	125	± 62	[125]						195		2200-A01-125-2
	150	± 75	[150]						220		2200-A01-150-2
	200	± 100	[200]					-	270	-	2200-A01-200-2
	250	± 125	[250]						320		2200-A01-250-2
	300	± 150	[300]						370		2200-A01-300-2
	350	± 175	[350]						420		2200-A01-350-2
	400	± 200	[400]						470		2200-A01-400-2
	450	± 225	[450]						520		2200-A01-450-2
2 Hour Fire Rated (120 mins)											2200-A01-500-2
2 Hour Fire Rated (120 mins)											
Floor - Wall Corner Wall Wall - Ceiling	25	± 12	[25]						60		2200-A02-025-2
	50	± 25	[50]						85		2200-A02-050-2
	75	± 37	[75]						110		2200-A02-075-2
	100	± 50	[100]						135		2200-A02-100-2
	125	± 62	[125]						160		2200-A02-125-2
	150	± 75	[150]						185		2200-A02-150-2
	200	± 100	[200]					-	235	-	2200-A02-200-2
	250	± 125	[250]						285		2200-A02-250-2
	300	± 150	[300]						335		2200-A02-300-2
	350	± 175	[350]						385		2200-A02-350-2
	400	± 200	[400]						435		2200-A02-400-2
	450	± 225	[450]						485		2200-A02-450-2
2 Hour Fire Rated (120 mins)											2200-A02-500-2

Features

Movement

High movement capacity
ASTM E-1399 Class I: Thermal
Class II: Wind

Material

High-temperature refractory ceramic fibre
Stainless steel foil sheath

Traffic Frequency per day

				
-	-	-	-	-

System Options

Gap width(s)	25, 50, 75, 100, 125, 200, 250, 300, 350, 400, 450, 500 mm
Height(s)	Not applicable
Metal type(s):	304-grade Stainless Steel foil
Colour(s)	Stainless Steel sheath
Fire barrier	UL 2079: 120 minutes
Waterproofing	Waterproofing membrane
Pre-assembly in factory	Contact Vexcolt

FIRE BARRIER SYSTEM
Floor to Floor | Wall to Wall | Corner
25 - 500 mm (1 - 20") Expansion Gaps

Fireflex 2200 : A01-A02



APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
Department Stores | Distribution & Retail Warehouses
Factories | Hospitals | Museums | Offices & Hotels
Parking | Places of Worship | Residential Buildings
Rail, Metros & Elevated Rail Stations | Roads & Bridges
Shopping Centres | Sports Stadiums | Supermarkets

www.vexcoltindia.com