


CONTROL JOINT

Floor to Floor
10 - 20 mm (13/32 - 25/32") Joint Width

Micratec : TB

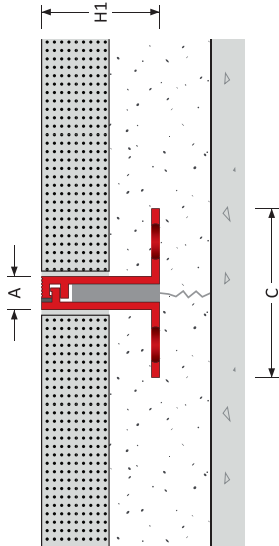

Control Joint Selection Criteria Load Rating Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm) ±	Eurocode Rating	Product Dimensions		Product Number
				H1 (mm)	H2 (mm)	
Floor - Floor	-	± 1.0	10 kN	25: 35: 50: 75	10	TB-010-(H1)
		± 1.5	46 kN		15	TB-015-(H1)
		± 2.5	5 kN		20	TB-020-(H1)

When specifying or ordering please add the height (H1) required to the Product Reference.
For example Micratec : TB-015-050 denotes a control joint 50mm deep.



United Kingdom | T : +44 (0) 3707 876 543 | E : info@vexcolt.com | W : www.vexcolt.com
India | T : +91 9599 291 000 | E : info@vexcoltindia.com | W : www.vexcoltindia.com

Features

Surface

Easy transit: Americans with Disabilities Act (ADA) compliant across the entire movement cycle
10mm minimum visible line width between finishes

Movement

Excellent movement capacity for profile width

Traffic Frequency per day

					
> 25,000	≤ 100	≤ 100	≤ 100	≤ 100	≤ 10

System Options

Sightline width(h(s)	10, 15, 20 mm
Height(s)	25, 35, 50, 75 mm
Metal type(s)	6063 T5 & T6 Aluminium
Seal colour(s)	No seal used
Fire barrier	Not applicable
Waterproofing	Not applicable
Pre-assembly in factory	Not applicable

CONTROL JOINT

Floor to Floor
10 - 20 mm (13/32 - 25/32") Joint Width

Micratec : TB



APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
Department Stores | Distribution & Retail Warehouses
Factories | Hospitals | Museums | Offices & Hotels
Parking | Places of Worship | Residential Buildings
Rail, Metros & Elevated Rail Stations | Roads & Bridges
Shopping Centres | Sports Stadiums | Supermarkets

www.vexcoltindia.com